

# SceneCatcher™

## Better Under Fire.

The flexibility and technology firefighters have asked for is finally here: Bullard SceneCatcher™. Now, firefighters will be able to capture 60 minutes of video, as well as 300 still images from their Bullard Thermal Imager. Digital images and videos download easily through a USB connection to a computer for use in analysis and records of evidence.

## SEE The Action


- Housed in a rugged handle
- Mounts easily on T3 and T4 series thermal imagers

## RECORD The Footage


- Simultaneously record images and video
- Capture 60 minutes of video and 300 still images

## TAKE IT With You

- Download images and video easily through a USB connection
- Optional transmitter transmits up to 600 feet

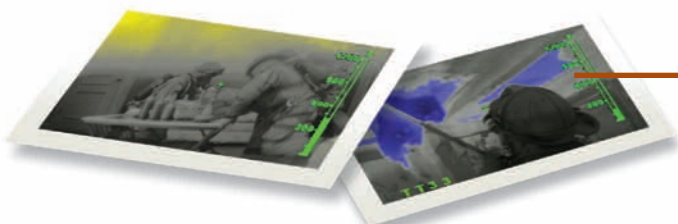

Capture up to 300 printable still images

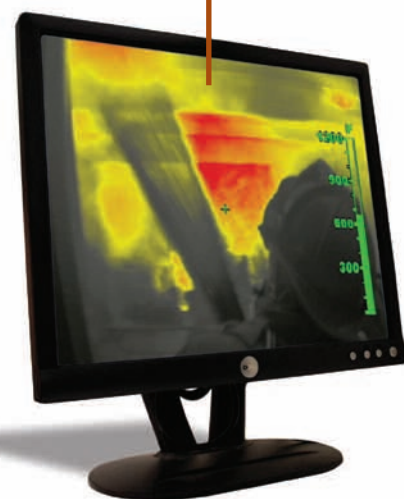

Record up to 60 minutes of video



www.bullard.com

# SceneCatcher™

## Specifications and Transmitting Option



SceneCatcher™ is the latest response from Bullard to requests we've heard from firefighters in the field. When entering a scene, a camera user will now be able to take both snapshots and video of the images they see on their Bullard Thermal Imager. This enables a greater capability not only in sizing up and managing a situation, but also for study during overhaul. The unit mounts easily on Bullard T3 and T4 series thermal imagers, and is available with and without transmitter capability.

### SceneCatcher Technical Specifications

Video format: NTSC

Video export: AVI encoding

Video image size: 320 x 240

Video record time: 60 minutes

Still image export: JPEG

Still image resolution: 320 x 240

Still image capacity: 300 images

PC connection: USB / Camera connection: 5-pin

### Transmitter Technical Specifications

Mounting: External

Antenna Type: Dipole

Power Output: 750 mW

Power Consumption: 2.6 W

Nominal Range: 600 feet (through typical frame construction)

Signal Type: Analog

Transmitting Frequency: 2.4 GHz

Power Supply: Internal

FCC License: Part 90



SceneCatcher is housed in a handle, which can also include a transmitter. With the optional two-channel transmitter, users can record images and video and simultaneously transmit to one or more receiving devices, such as the Bullard MobileLink handheld receiver or the Mobile Command Center. Already using a Bullard transmitter? You can upgrade your transmitter handle to include the SceneCatcher.

#### Americas:

##### E.D. Bullard Company

1898 Safety Way • Cynthia, KY 41031-9303  
Toll free: 877-BULLARD (285-5273)  
Tel: 859-234-6616 • Fax: 859-234-8987  
[www.bullard.com](http://www.bullard.com)

#### Europe:

##### Bullard GmbH

Lilienthalstrasse 12  
53424 Remagen • Germany  
Tel: +49-2642 999980 • Fax: +49-2642 9999829  
[www.bullardextrem.com](http://www.bullardextrem.com)

#### Asia-Pacific:

##### Bullard Asia Pacific Pte. Ltd.

LHK Building  
701, Sims Drive, #04-03 • Singapore 387383  
Tel: +65-6745-0556 • Fax: +65-6745-5  
[www.bullard.com](http://www.bullard.com)

©2008 Bullard. All rights reserved.

SceneCatcher and MobileLink are trademarks of Bullard.

Kevlar and Neoprene are registered trademarks of E.I. DuPont de Nemours & Company.

Ultem is a registered trademark of General Electric.

