



**NFPA
1801-2013
COMPLIANT**

Maximum Image Quality & Performance

The new T4N thermal imager delivers unrivaled performance and image quality on the industry's largest, brightest viewing display. Meeting all requirements of NFPA 1801-2013, the T4N gives you the extra assurance of maximum durability and performance. With all of these benefits, the T4N is the ultimate choice for firefighting thermal imaging.



NFPA Compliance

- Meets all requirements of NFPA 1801-2013 Standard on Thermal Imagers for the Fire Service
- Class I, Division 2 rated for use in hazardous locations
- Two operational modes: BASIC and BASIC PLUS (for full feature performance)
- Intuitive and easy battery change

State-of-the-Art Performance


- **Technology Optimization Package (T.O.P.)**
optimizes display and engine performance for unmatched scene dynamics and image clarity
- Ultra-High resolution 320 x 240 detector
- Super Red Hot colorization alerts firefighters to areas of intense heat
- Electronic Thermal Throttle® isolates heat sources
- More than 1100°F saturation temperature

Wide Video Display with Vivid Imagery

- Extra-large 4.3" widescreen format Liquid Crystal Display
- Super-bright display enables viewing in thick smoke and direct sunlight
- 450:1 Contrast Ratio emphasizes deep blacks and bright whites and enhances image detail

Closer to the Action Viewing

- 2x and 4x digital zoom
- Improved visibility

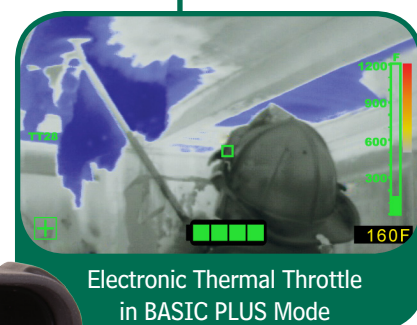

T4N shown in BASIC PLUS Mode

**Bullard
TOUGH**

 **Bullard®**

www.bullard.com



Technical Specifications

Overall T4 Unit

Weight with battery	3.9 pounds
Without battery	3.3 pounds
Dimensions	Height: 7.9" Length : 5.8" Width : 5.5"
Heat Test	500°F (260°C) for 8 minutes 300°F (150°C) for 16 minutes
Water Resistance	IP67
Impact/Drop Test	No functional damage, 6' (2 M) drop
Hazardous Locations:	Class I, Division 2, Groups C or D

Casing

Shell Material	Ultem® Thermoplastic
Sealing	Silicone and Neoprene®
Strap Material	Kevlar®
Lens Window	Germanium (2 mm thick)
Display Cover	Polycarbonate

Core/Detector

Type	Uncooled Microbolometer with Digital Processing, Pixel Smoothing
Resolution	320 x 240 array
Sensing Material	Amorphous Silicon
Spectral Response	7.5 - 14 Microns
Thermal Stabilization	0°F to 175°F (-20°C to 85°C)
Update Rate	30 Hz
Temperature Sensitivity	0.05°C
Video Output	NTSC
NETD	50 mK
Dynamic Range	1100°F (600°C)
Pixel Pitch	30 µm
Thermal Time Constant	10 ms
Video Polarity	White-Hot
Relative Heat Indicator (temperature measurement)	Sliding Bar Scale
Super Red Hot	Color above 500°F (250°C)

Lens

Material	Germanium
Lens Size	5.8 mm
Field of View	32°V x 50.0°H
Focus	Fixed 3' to infinity
Speed	f/1.0

Electrical System

Power Source	NFPA NiMH Rechargeable Battery
Output	9.6V nominal
Operating Time	>3 hours nominal
Start Up Time	<4 seconds
Desktop Charger	20 VDC Input
Powerhouse Charger	12-36 VDC Input
Switch Cycle Test	1,000,000 cycles
Battery Weight	0.6 pounds
Recharge Time	2.5 hours nominal

Display

Type	Digital, Liquid Crystal Display (LCD)
Size	4.3" Diagonal TFT Active Matrix
Dot Pitch	0.198mm (H) x 0.198mm (V)
Dot Format	480 X 272 Dots
Pixels	130,560
Pixel Configuration	Vertical Stripes
Display Method	NTSC
Back Light	10 L.E.D.
Brightness	650 cd/m²
Display Contrast Ratio	450:1
Viewing Angle	Vertical = +50°/-60° Horizontal = +/- 65°

NOTE

Comes standard with two batteries, AC/DC battery charger, carrying strap, interactive training CD-ROM, and instruction manual in a protective cardboard carrying case. The T4N can be adapted to mount a handle, transmitter, or DVR. The T4N is covered by a 12-month warranty on all parts and labor and a lifetime housing warranty.* Attachable accessories are not NFPA-compliant.

* Limitations and exclusions apply.

Accessories



MobileLink
Handheld Receiver



Alkaline Pack

SceneCatcher &
Transmitter



Powerhouse Charger



Americas:
Bullard
1898 Safety Way
Cynthiana, KY 41031-9303 • USA
Toll-free within USA: 877-BULLARD (285-5273)
Tel: +1-859-234-6616
Fax: +1-859-234-8987

Europe:
Bullard GmbH
Lilienthalstrasse 12
53424 Remagen • Germany
Tel: +49-2642 999980
Fax: +49-2642 9999829

Asia-Pacific:
Bullard Asia Pacific Pte. Ltd.
LHK Building
701, Sims Drive, #04-03
Singapore 387383
Tel: +65-6745-0556
Fax: +65-6745-5176



©2012 Bullard. All rights reserved.
Electronic Thermal Throttle is a registered trademark of Bullard.
Kevlar and Neoprene are registered trademarks of E.I.
DuPont de Nemours & Company.
Ultem is a registered trademark of General Electric.

www.bullard.com

8453 (1212)