
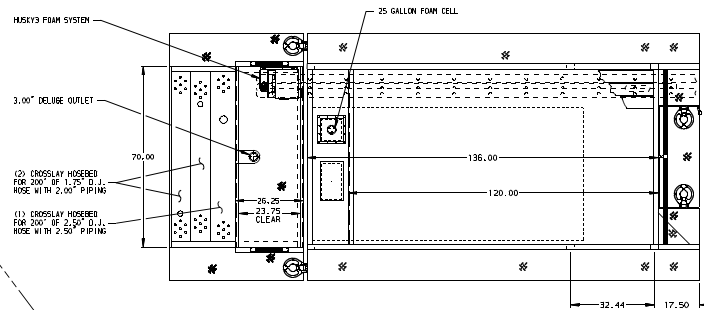
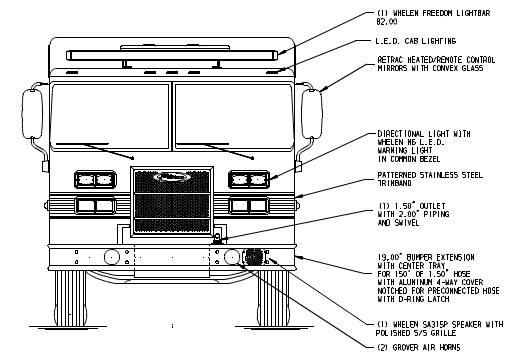



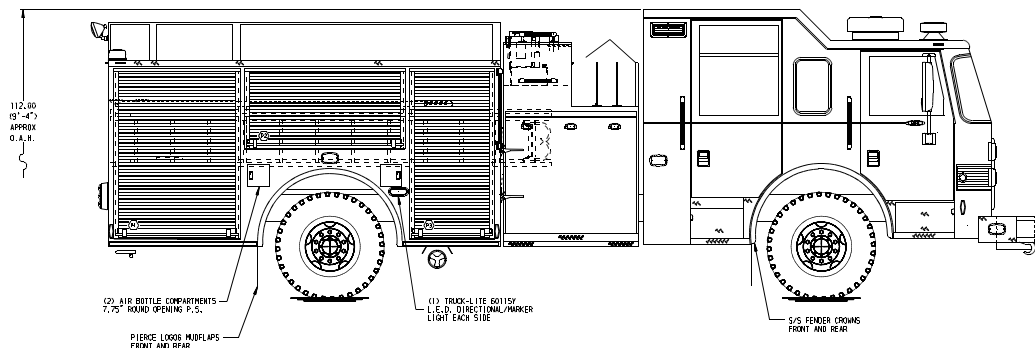


HOSERED CAPACITIES

① 500' OF 2.50" D.I. HOSE

② 1000' OF 5.00" D.I. HOSE

③ 500' OF 2.50" D.I. HOSE

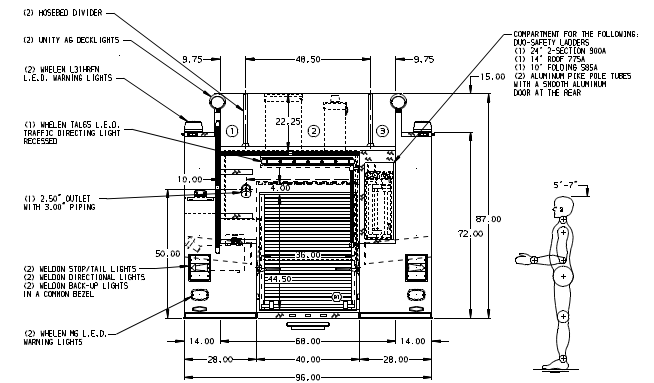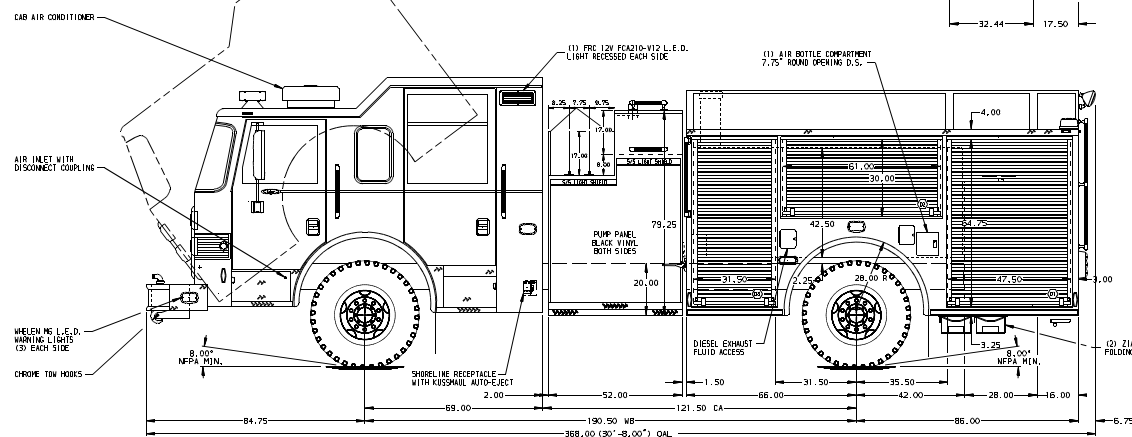

ALUMINUM BODY

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

- BATTERY CHARGER LOCATED BEHIND DRIVER SEAT
- PERIMETER SCENE LIGHTS LOCATED PER SWP ORDER
- 5/8" PROTECTIVE GUARDS FOR ROLL-UP LOGS LOCATED IN ALL COMPARTMENTS
- PAINTED SHELF TRACKS LOCATED IN COMPARTMENTS D1, D3, P1 & P3
- MOUNTING PROVISIONS FOR FRONT INLET
- FULL WIDTH/DEPTH HOUSABLE SHELVES IN COMPARTMENTS D1, D3, P1 & P3
- MOUNTING PROVISIONS FOR WLL-SPT, NIGHT SCAM POWER LITE NO 3.0 10"

CUSTOMER APPROVAL

APPROVED BY: _____

DATE: _____

REV	DATE	BY	CHK	SB6912
1	04/JUN/13	SH	SH	PIERCE
2	20/JUN/12	SH	SH	PIERCE
3	05/JUN/12	BD	TEO	PIERCE

Pierce MANUFACTURING INC.

TITLE 1500-D-775-P 750 WATER, 25 GAL FOAM CELL, 152" FH
(3) X-LAYS, LADDERS ALONGSIDE TANK, A/C
FOR PIERCE FIELD UNIT
PIERCE MANUFACTURING INC.

JOB NO.	24952
SCALE	1:24
DATE	01 JUL 11
DRAWN BY	MWE
CHECKED BY	TEO
SHEET NO.	1
SHEET TOTAL	1

24952AD