




CHASSIS Enforcer Chassis ENGINE 450 HP Cummins L9 Engine		CAB 7010 Enforcer Cab BUMPER 22" Extended Stainless Steel		AXLE, FRONT, CUSTOM 22,800 Lb TAK-4 Axle AXLE, REAR 44,000 Lb Meritor Axle		TRANSMISSION Allison 5th Gen, 3000 EVS P		PUMPHOUSE 52" Control Zone Side Mount PUMP 2000 GPM Waterous CSU		CROSSLAYS, 1.50" (2) 1.50" Standard Capacity CROSSLAYS, 2.50" (1) 2.50" Standard Capacity		SPEEDLAYS SpeedLays Not Required GENERATOR Generator Not Required		SAFETY Side Roll and Frontal Impact Protection		CUSTOMER APPROVAL APPROVED BY: _____ DATE: _____		 MANUFACTURING INC.		JOB NO. 33211					
NOTE DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.		1. 21.00" LIMITED RETRACTION REQUIRED 2. ONE 1.50 OUTLET WITH 2.00 PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY 3. SHORELINE RECEPTACLE WITH KUSSMALL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB 4. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPPWELL 5. BATTERY CHARGER LOCATED BEHIND DRIVER SEAT 6. BATTERY CHARGER INDICATOR BEHIND DRIVER'S SEAT DISPLAYED THROUGH WINDOW 7. FIVE ADJUSTABLE SHELVES IN COMPARTMENTS PER SHOP ORDER 8. FOUR FLOOR MOUNTED SLIDE-OUT TRAYS IN COMPARTMENTS PER SHOP ORDER 9. ONE SWING-OUT TOOL BOARD WITH PEGBOARD PATTERN IN COMPARTMENT PER SHOP ORDER 10. 1500 GPM HIGH FLOW WATERWAY 11. 3.00" RAISED AERIAL PEDESTAL														CHASSIS DATA		TITLE		107' ASCENDANT AERIAL LADDER AND BODY ASSEMBLY		DRAWN BY LWE		190CT18	
																MAKE		FOR		PIERCE FIELD UNIT		CHECKED BY THS		230CT18	
																PIERCE				APPLETON, WISCONSIN					
																MODEL		DWG		NO.		SHEET SIZE		SHEET NO.	
												REV		DATE		BY		CH		ENFORCER		33211AD		D	





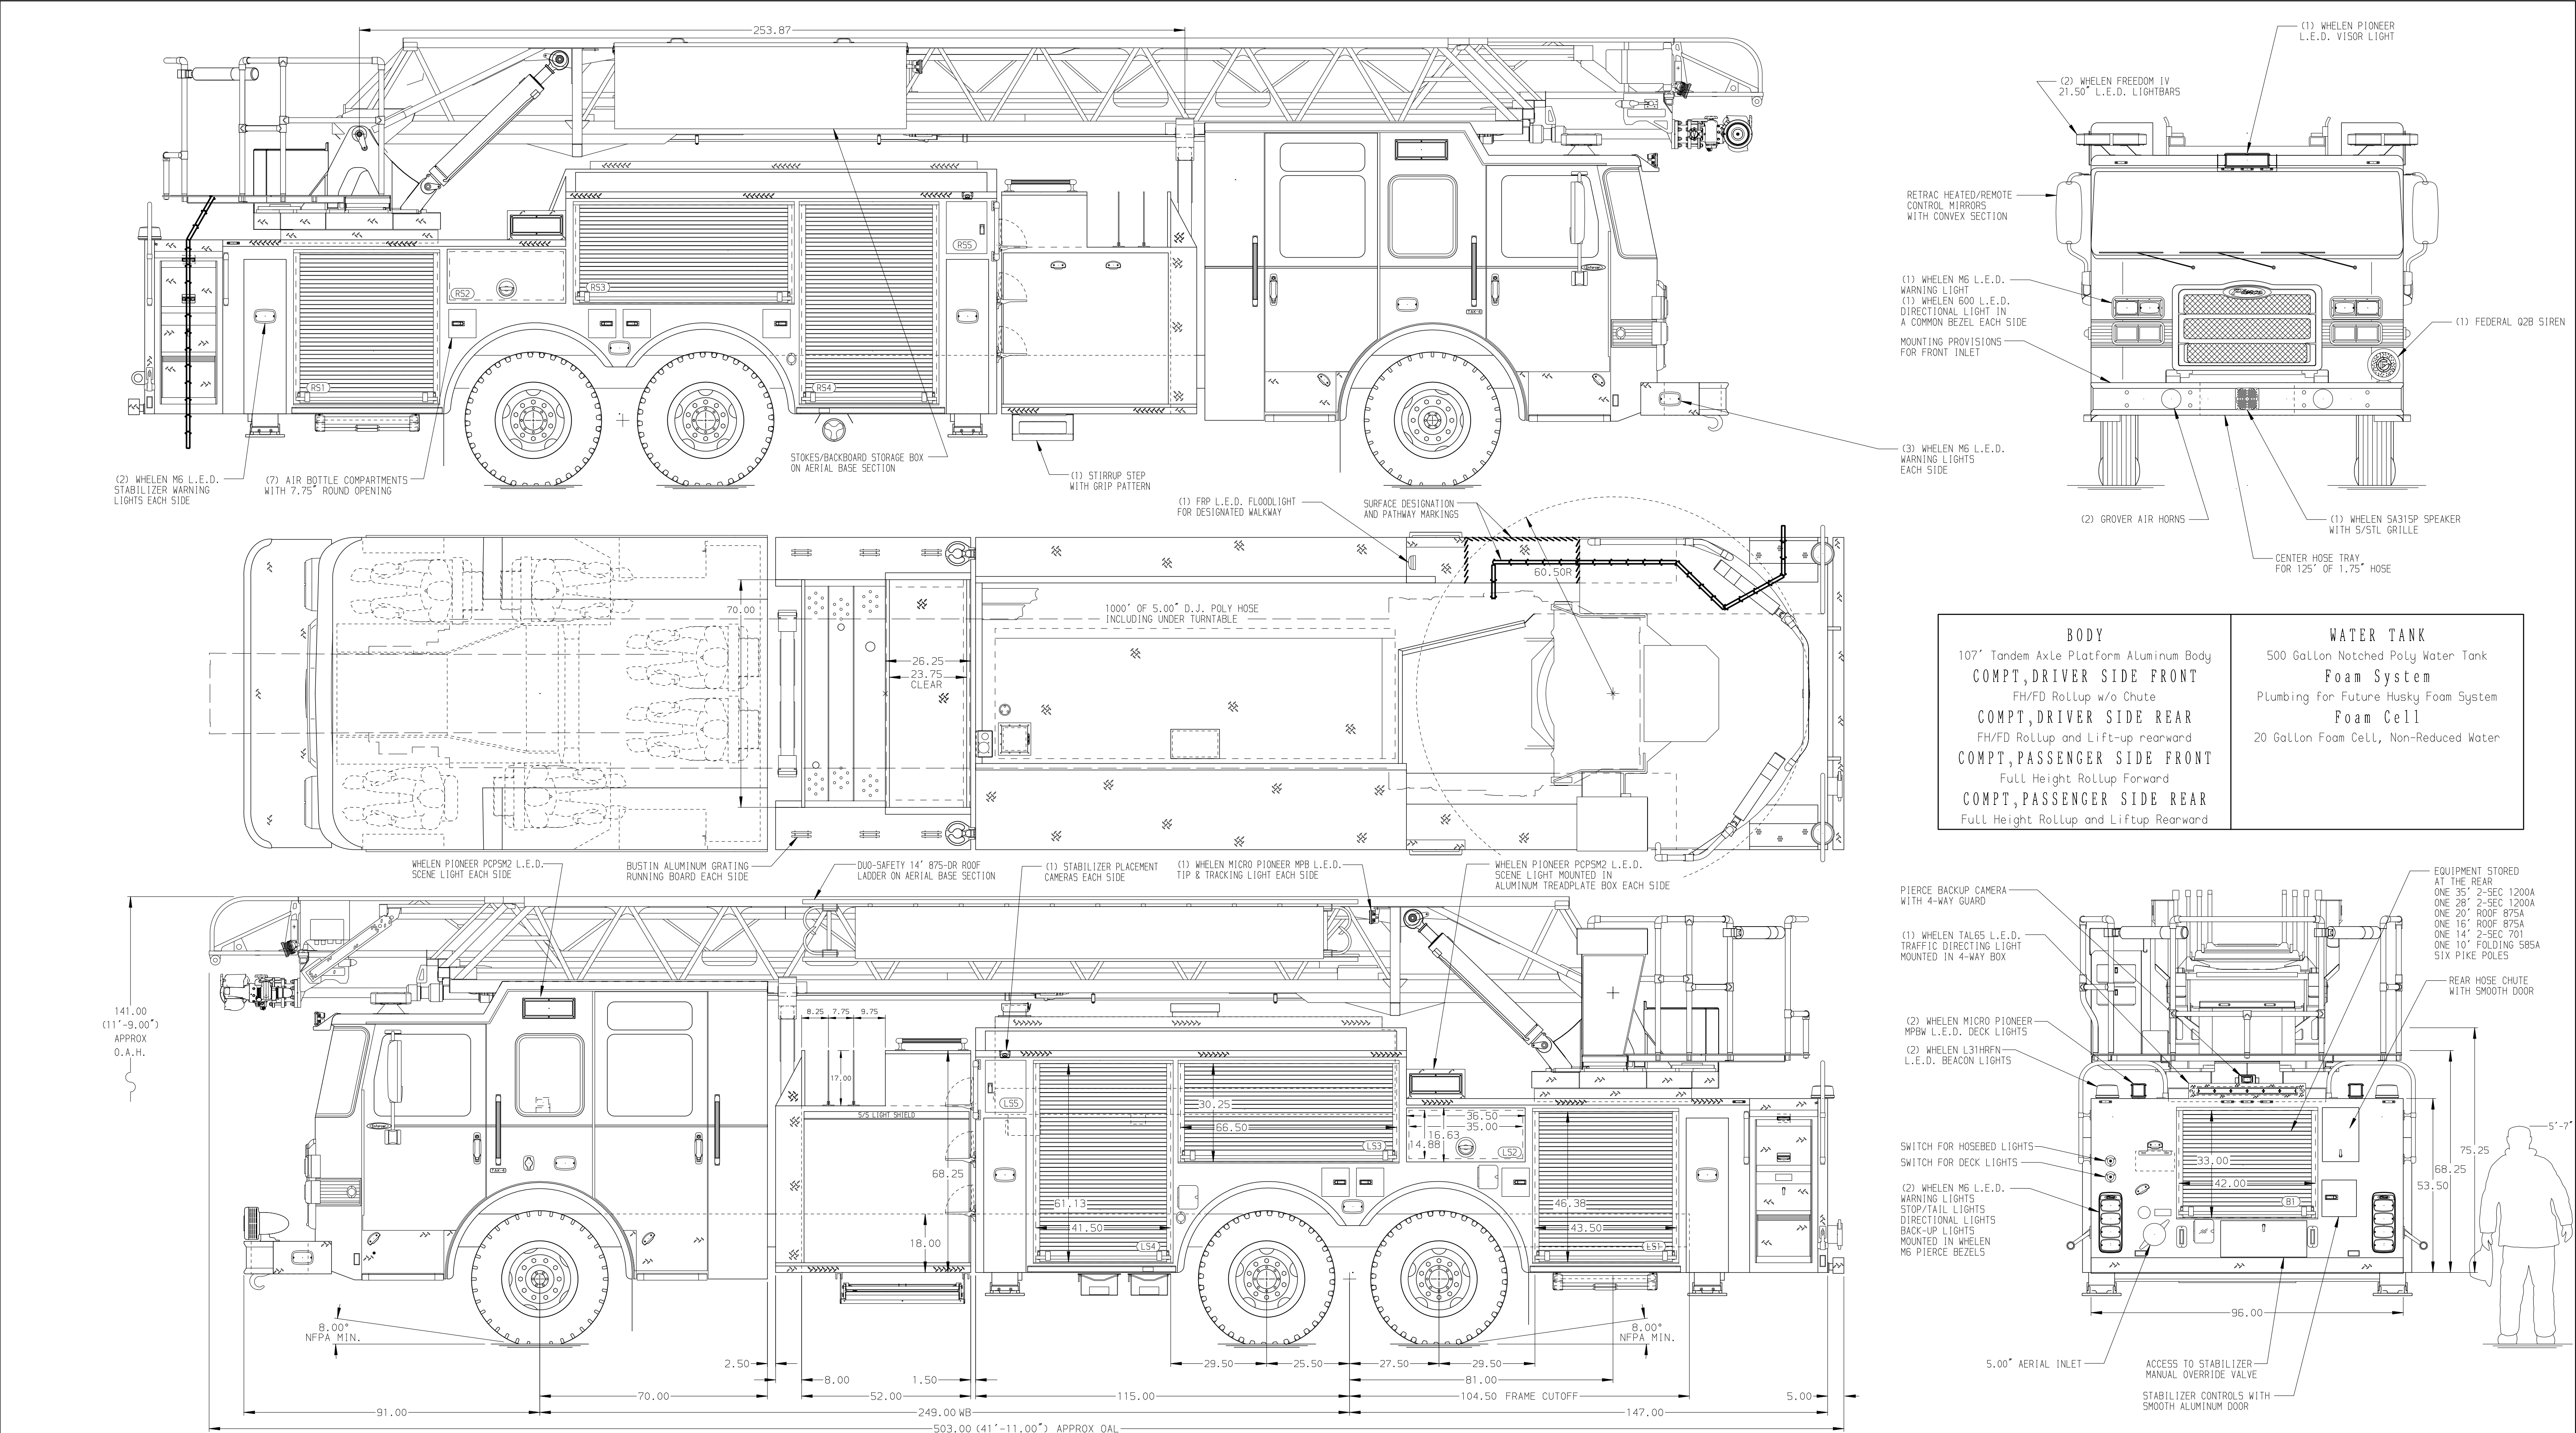



























